

# ➤ N2 hard shoulder


## N2BL300

### components

- W beam 5333 mm th. 2,0 mm;
- "C" section post 25x60x100 mm th. 4,0 mm  
H= 1630 mm c/c 2666 mm;
- Bolts and nuts;
- Stiffner for "C" section post
- Reflectors (1 every 12,0 m)

This barrier provides Approach/Escape End Sections of 32,0 m (16,0 for approach + 16,0 for escape)

### section

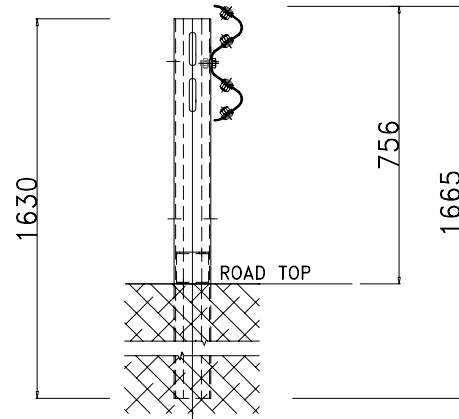

- **Dwg. n.: N2BL300**  
c/c distance between the posts: **2.666 mm**

### performance

TB11 - Car 900 kg

Test: IME/GAM -002/1144A

ASl: A - 0,70

TB32 - Car 1.500 kg


Test: IME/GAM-001/1143

$W_N$ : m 1,1 (W4)

$D_N$ : m 1,1

$Vl_N$ : m 1,1 (VI4)

FRONT VIEW

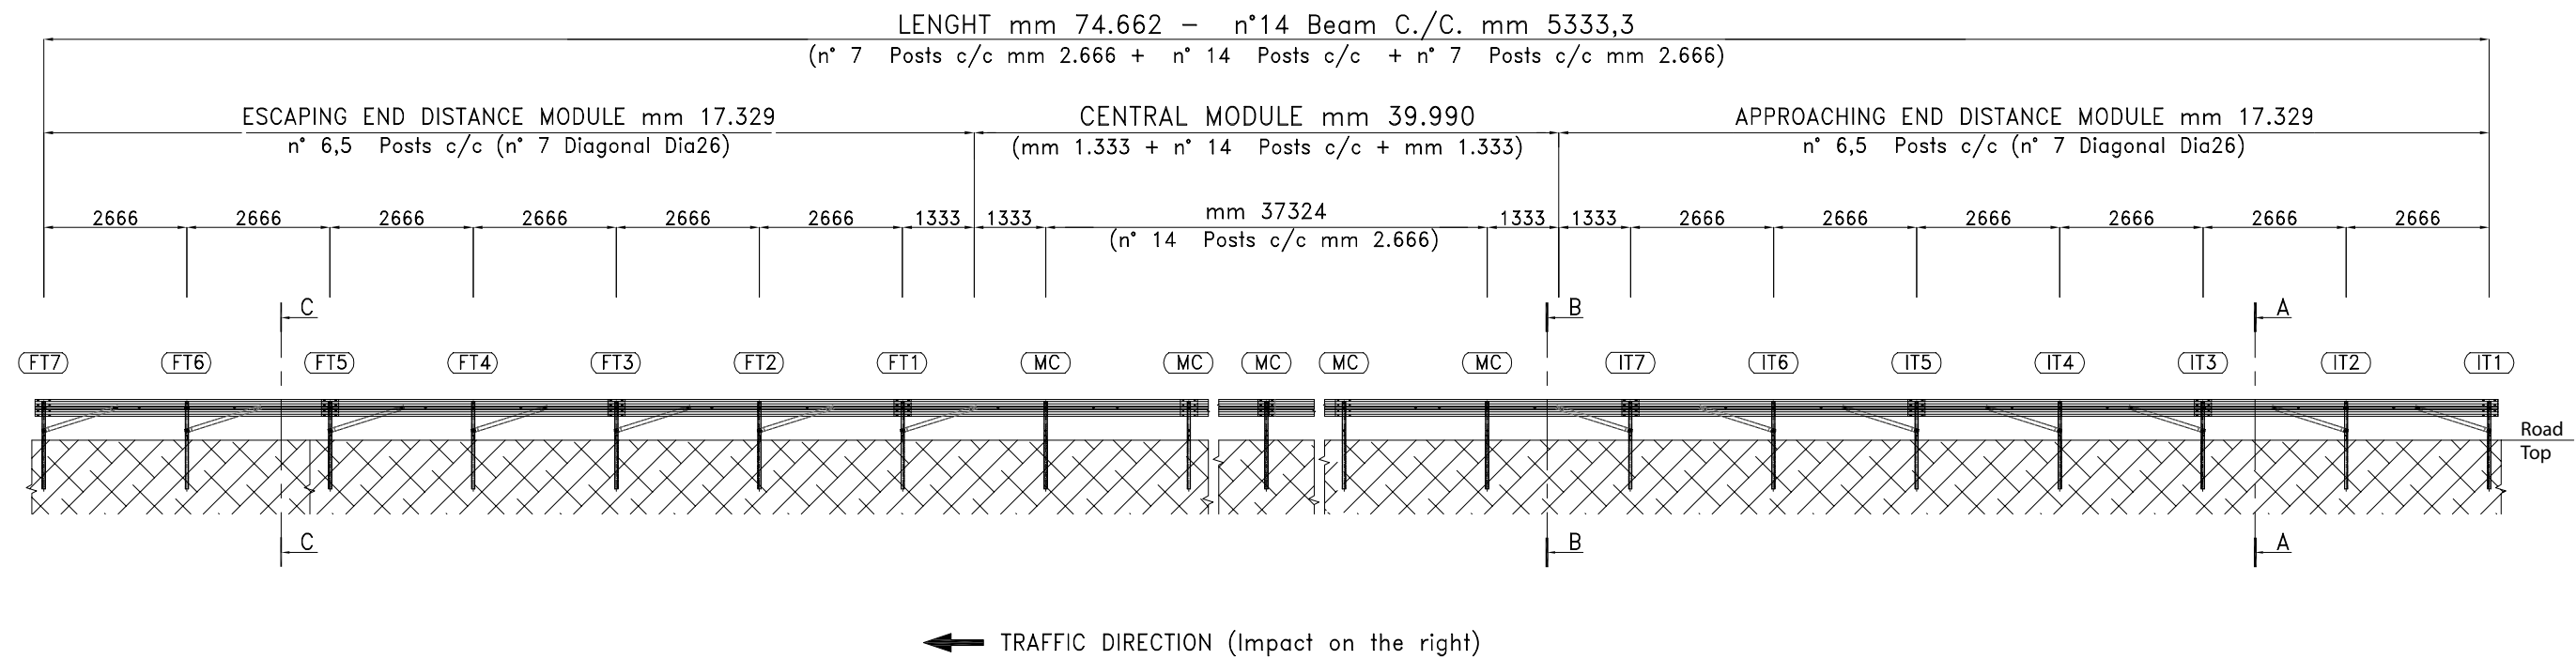

TOP VIEW

