

➤ N2hard shoulder


N2BL400

components

- W beam 5333 mm th. 2,0 mm;
- "C" section post 25x60x100 mm th. 4,0 mm
H= 1630 mm c/c 4000 mm;
- Stiffner for "C" section post;
- Bolts and nuts;
- Reflectors (1 every 12,00 m)

This barrier provides Approach/Escape End Sections of 21,332 m (10,666 for approach + 10,666 for escape)

section

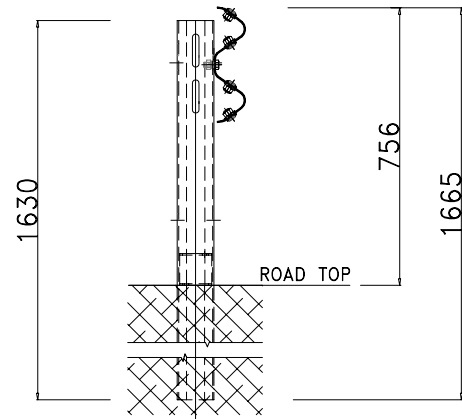

● Dwg. n.: N2BL400

c/c distance between the posts: 4.000 mm

performance

TB11 - Car 900 kg

Test: IME/GAM-005/1148

ASI: A - 0,70

TB32 - Car 1.500 kg


Test: IME/GAM-004/1147

W_N : m 1,7 (W5)

D_N : m 1,6

Vl_N : m 1,7 (VI5)

FRONT VIEW

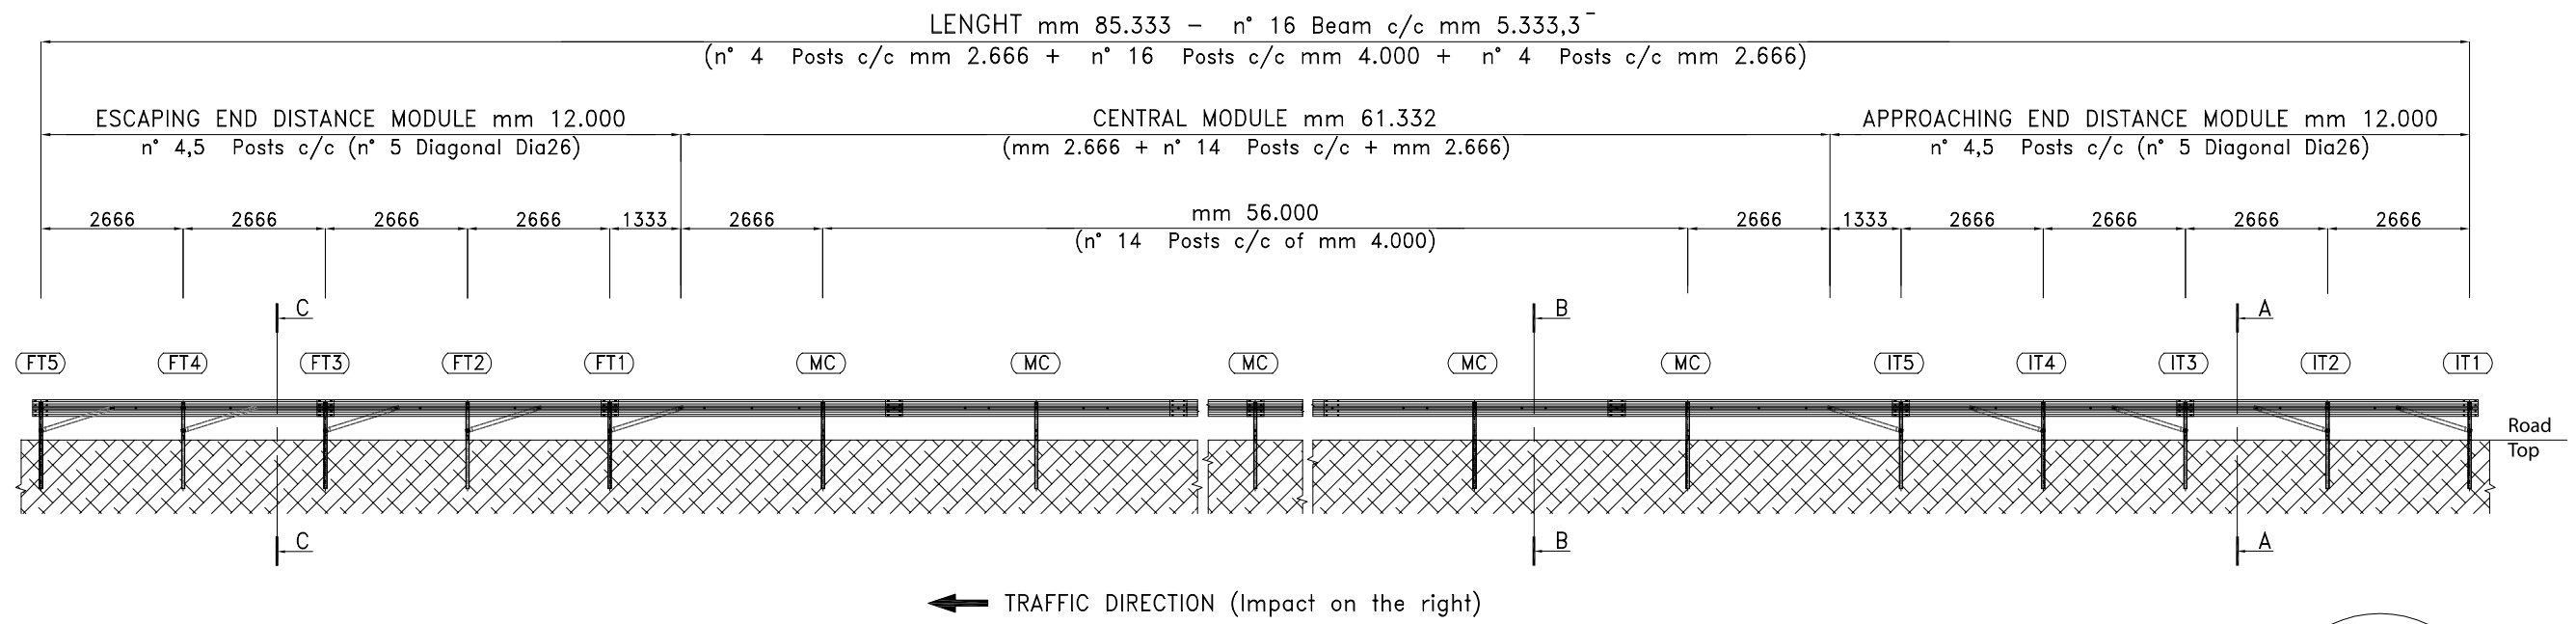

TOP VIEW

