

# ➤ N2hard shoulder


## N2BL500

### components

- W Beam 5333 mm th. 2,5 mm;
- "C" Section Post 25x60x100 mm th. 4,0 mm  
H = 1630 mm c/c 2666,6 mm;
- "U" Spacer th. Mm 3;
- Stiffner for "C" Post;
- Adjusting setting plate;
- Unthreading proof little plate;
- Bolts and Nuts;
- Reflector (n° 1 every 16 m).

This Barrier provides, for each section of barrier, the installation mitred Approach / Escape modules for a total length of 19, 046 m (9,523 for Approach+ 9,523 for Escape)

### section

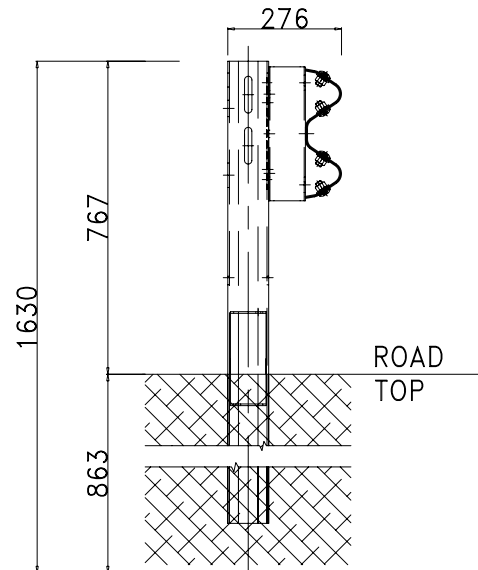

- **Dwg. n.: N2BL500**  
c/c distance between the posts: **2.666 mm**

### performance


TB11 - Car 900 kg

Test: 899\_A  
ASI: A - 0,70

TB32 - Car 1.500 kg

Test: 898  
W<sub>N</sub>: m 0,8 (W2)  
D<sub>N</sub>: m 0,7  
V<sub>I</sub>: m 0,6 (VI1)

FRONT  
VIEW

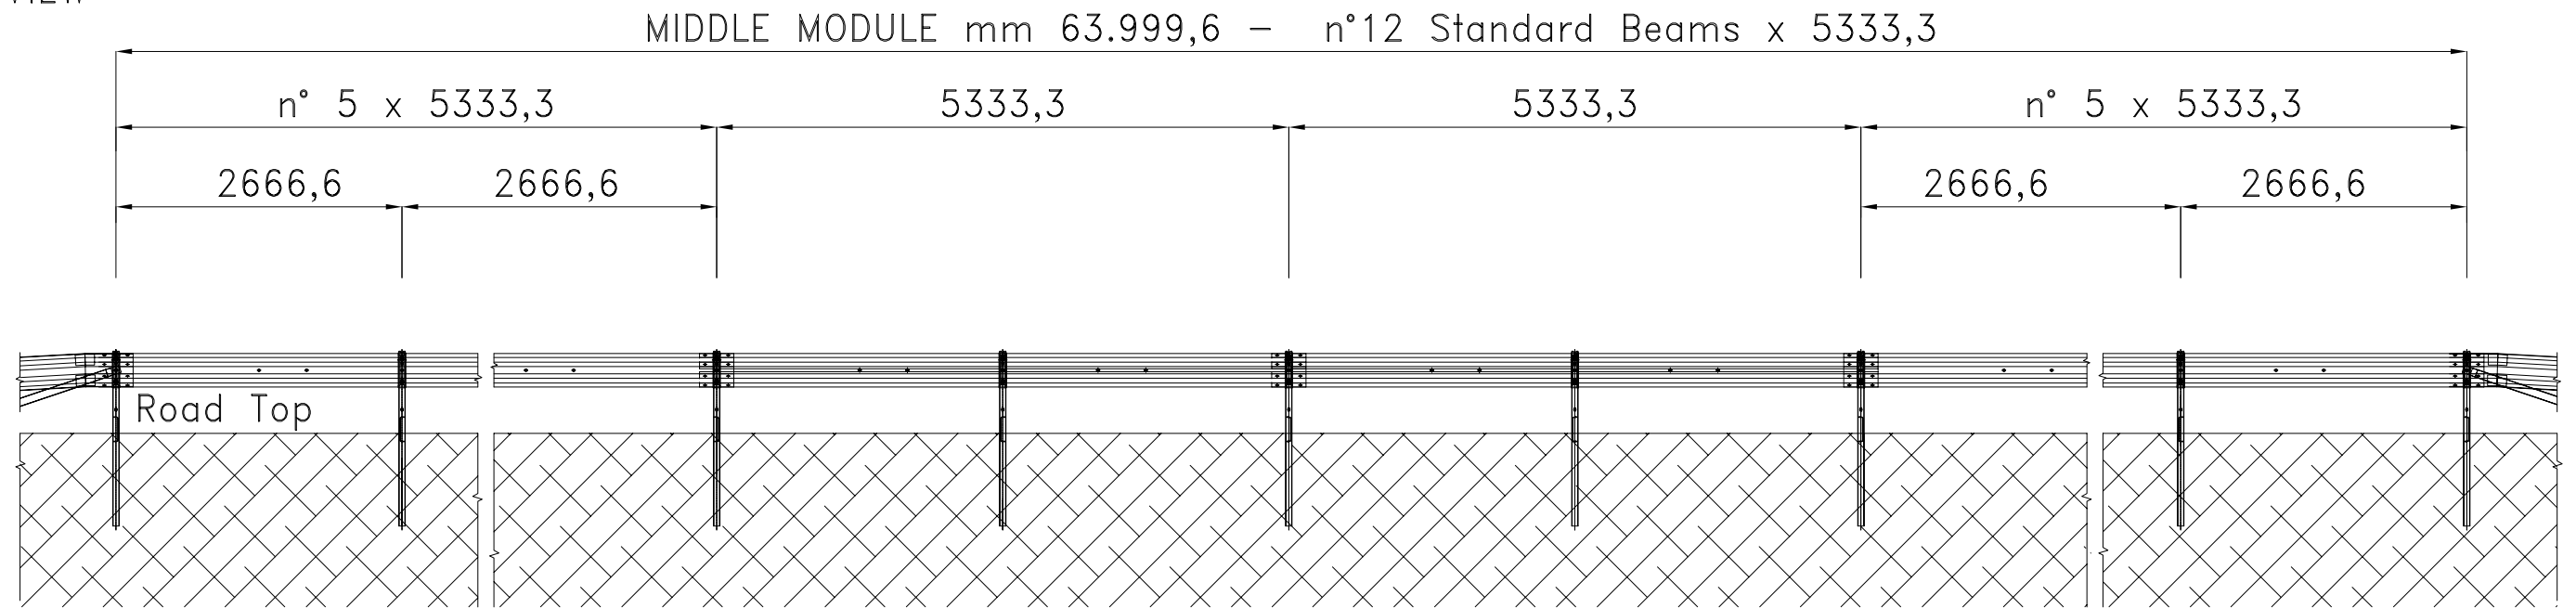

TRAFFIC DIRECTION (Impact on the left) →

TOP  
VIEW

